10.46G
10.46D

Quick Start Guide

For more information about how to use the phone, please go to www.alcatelonetouch.com to download complete user manual (English version only). Moreover, from the website you can also consult FAQ, realize software upgrade, etc. (English version only).

SAR

www.sar-tick.com

This product meets applicable national SAR limits of 2.0 W/kg. The specific maximum SAR values can be found on page 21 of this user guide.

When carrying the product or using it while worn on your body, either use an approved accessory such as a holster or otherwise maintain a distance of 10 mm from the body to ensure compliance with RF exposure requirements. Note that the product may be transmitting even if you are not making a phone call.

PROTECT YOUR HEARING

To prevent possible hearing damage, do not listen at high volume levels for long periods. Exercise caution when holding your device near your ear while the loudspeaker is in use.

ALCATEL onetouch

1 Your mobile.....

1. Left softkey
2. Pick up/Send call
   Call log
3. Voicemail
   (press and hold)
4. Right softkey
5. Switch on/Switch off
   End call
6. LED Flashlight
7. Navigation key:
   Menu/Confirm an option (OK)
   Profiles
   Calendar
   Messages
   Alarm

1.1 Keys

OK — Navigation key
Confirm an option (press the middle of the key)

Pick up
Send a call
In idle screen:
Access call log (Redial) (press)

Switch on/Switch off the telephone (press and hold)
End call
Return to idle screen

Left softkey

Right softkey

Access your voicemail (press and hold)

In Edit mode:
- Press: access the symbols table
- Press and hold: enter zero

In Edit mode:
- Press: change input methods

In idle screen:
- Press: #
- Press and hold: activate/deactivate vibrate mode

In Edit mode:
- Press: (space)

5 JKL — From Idle screen
- Press: dial '5'
- Press and hold: switch the LED Flashlight on/off

1.2 Main screen icons (1)

In 1046G:

- **Battery charge level**
- **Call forwarding activated**: your calls are forwarded
- **Alarm or appointments programmed**
- **Level of network reception**
- **Voicemail message received**
- **Missed calls**
- **Radio is on**
- **SMS unread**
- **GPRS connected**
- **Bluetooth activated**
- **Silence mode**: your phone does not ring, beep or vibrate with the exception of the alarm
  Vibrate mode
- **Flight mode**
- **BT dialer activated**
- **SD card detected**

In 1046D:

- **Level of network reception.**
- **Call forwarding activated:** your calls are forwarded.
- **Roaming**
- **GPRS connected**

(1) The icons and illustrations in this guide are provided for information purposes only.

2 Getting started.....

2.1 Set-up

Removing and installing the back cover

Removing and installing the battery

Inserting and removing the SIM card



Place the SIM card with the chip facing downwards and slide it into its housing. Make sure that it is correctly inserted. To remove the card, press it and slide it out.

Charging the battery

Connect the battery charger to your phone and mains socket respectively.

- Charging may take about 20 minutes to start if the battery is flat.
- Be careful not to force the plug into the socket.
- Make sure the battery is correctly inserted before connecting the charger.
- The mains socket must be near to the phone and easily accessible (avoid electric extension cables).
- When using your telephone for the first time, charge the battery fully (approximately 3 hours). You are advised to fully charge the battery ( ).
- To reduce power consumption and energy waste, when battery is fully charged, disconnect your charger from the plug; reduce the backlight time, etc.

The charge is complete when the animation stops.

2.2 Power on your phone

Hold down the key until the phone powers on.

2.3 Power off your phone

Hold down the key from the main screen.

3 Calls.....

3.1 Making a call

Dial the desired number then press the key to place the call. If you make a mistake, you can delete the incorrect digits by pressing the right softkey.

To hang up the call, press the key.

Making an emergency call

If your phone is covered by the network, dial emergency number and press the key to make an emergency call. This works even without a SIM card and without typing the PIN code.

3.2 Calling your voicemail (1)

To access your voicemail, hold down the key.

3.3 Receiving a call

When you receive an incoming call, press the key to talk and then hang up using the key.

3.4 Available functions during the call

During a call, you can use your directory, your calendar, short messages, etc. without losing your correspondent.

(1) Contact your network operator to check service availability.

4 Contacts.....

4.1 Consulting your contacts

To access the **Contacts** from the main screen, press the OK key and select the icon from the menu.

* You can review contacts which are synchronized between your 1046G/1046D and the host phone. By pressing the OK and up/down keys, you can go to the last/next contact. Select the contact you wish to call and then press to make the call. You can also send a message to the contact by selecting **Options\Send message**.

4.2 Adding a contact

You can add a new contact to phone or SIM card by selecting "**Add contact**".

5 Messages .....

5.1 Create message

From the main menu select "**Messages**" to create text. You can type a message and you can also modify a predefined message in **Templates**. While writing a message, select "**Options**" to access all of the messaging options. You can save your messages that you send often to **Drafts**.

An SMS will be converted to MMS automatically when images, videos, audio, slides or attachments are inserted.

An SMS message of more than a certain number of characters (the number of characters depends on your language) will be charged as several SMS. An MMS message containing photos and/or sounds may also be billed as more than one message. Specific letters (accent) will increase the size of the SMS, this may cause multiple SMS to be sent to your recipient.

* Depends on software version and countries. If your phone have this feature, please activate BT dialer firstly (refer to 9.5 BT dialer for activation).

6 Call log .....

* You can review all of the host phone's missed, outgoing and incoming calls but you will not be able to delete this information from the host phone by using the local (1046G/1046D) phone.

You can select a contact in the host phone's call log list and then select **Options** to make a call or send a text message to them using the local phone.

6.1 Access

You can access the function using the following options:

- Select from main menu
- Press the send key from Home screen
- For dual SIM model, the complete contacts of both SIM1 and SIM2 are available in this menu (1).

* Depends on software version and countries. If your phone have this feature, please activate BT dialer firstly (refer to 9.5 BT dialer for activation).

(1) 1046D only.

* 5.2 View message

You can review messages which are synchronized between your 1046G/1046D and the host phone.
First, make sure the host phone can support the MAP protocol and that the Remote SIM/MSG setting is ON. Otherwise you will not be able to access messages in the host phone.
This phone can synchronize new messages with the host phone. You can view and compose new messages and reply to messages sent to the host phone via your 1046G/1046D. Sent messages will be synchronized with the host phone's sent box.
If the host phone is dual SIM mode, you may use 1046G/1046D to reply to host phone's messages via SIM1 but not available for SIM2.

6.2 Available options

When you press "**Options**", you can have access to **View, Send message, Save to Contacts, Edit before call, Add to Blacklist, Add to Whitelist, Delete** etc.

7 Camera .....

Your mobile phone is fitted with a camera for taking photos that you can use in different ways:

- Store them in your "**My files\Images**".
- Customise your main screen.

Switch to "**Video**" function through pressing **Camera\Options\ Access video**, then you are in framing mode. You may use the mobile screen as a viewfinder and press "**Options**" for the settings of **Quality**.

Make sure that microSD card is well inserted before taking photos.

8 Settings .....

From the main menu, select the menu icon and select the function of your choice in order to customise your telephone: **Profiles, Dual SIM settings**(1), **Phone settings, Call settings, Network, Connectivity, Security, Regulatory & Safety, Restore default**.

(1) 1046D only.

9 Tools.....

9.1 Alarm

Your mobile phone has a built-in alarm clock with a snooze feature.

9.2 Calculator

Enter a number, select the type of operation to be performed, and enter the second number, then press "=" to display the result.

9.3 Calendar

Once you enter this menu from the main menu, there is a monthly-view calendar for you to query date.

9.4 Notes

You can create a note in text format by accessing "**Tools\ Notes**" from the main menu.

9.5 Bluetooth

Access this feature by pressing OK to enter the main menu, then selecting "**Tools\Bluetooth**".

*** BT Dialler**
This phone includes a BT dialler feature which means that you can connect your 1046G/1046D with a host phone using a Bluetooth connection. Once they are successfully linked, you can then receive and make calls from the host phone using this phone. Other options include syncing with the host phone's contacts; viewing its call log; and viewing/making SMS messages sent to/from the host phone.

* Depends on software version and countries.

You can pair with the host phone by using Bluetooth.
Activate host connection: Turn Bluetooth on, select to see the list of available Bluetooth devices and then press **BT dialler\ On**.
You need to confirm your password (automatically displayed) in the host phone once you have chosen to pair it with your 1046G/1046D.
When pairing is successful, the host name will be visible on your 1046G/1046D.
You only need to pair your 1046G/1046D once. It automatically reconnects to your host phone once you turn on Bluetooth in your 1046G/1046D and host phones.

9.6 Converter

Weight converter and Length converter.

9.7 Voice Alarm

With this menu, you may create the voice file and set it as the alarm.

9.8 Fake call

This program enables you to call yourself by simulating a caller number/name, ringtone at a scheduled time. It helps you to politely escape from social situations at any time you wish. This call can be rejected by key.

9.9 Call filter

Enable blacklist, all callers in the list will be automatically blocked. Enable whitelist, only callers in the list can be connected. You are allowed to add 20 contacts to each list from the Contacts, call log, Messages or create directly by pressing OK.

9.10 Torch

To light in darkness, you may activate "**Torch**" by below operations:

In idle screen, press and hold 5 JKL to activate the flashlight; press or press and hold 5 JKL to deactivate it.

9.11 WAP

Access Wap options: **Homepage, Bookmarks, Go to URL, Recent pages, Settings**.

Make sure that microSD card is well inserted before accessing this feature.

9.12 Services

Contact your network operator to check service availability.

10 Media.....

10.1 FM radio

Your phone is equipped with a radio (1) with RDS functionality. You can use the application as a traditional radio with saved channels or with parallel visual information related to the radio program on the display if you tune to stations that offer Visual Radio service. You can listen to it while running other applications.

(1) The quality of the radio depends on the coverage of the radio station in that particular area.

10.2 Images

A library links to the images (stored in "**Images**") in phone or SD card set as wallpaper, power on/off display or sent by Bluetooth, etc.

10.3 Recorder

Accessing "**Recorder**" allows you to make voice or sound recordings.

10.4 Videos

Accessing "**Videos**" allows you to view the video stored in your phone. Press "**Options**" to Play/Send/Rename/Delete the file.

11 Music .....

Access this feature from the main menu by selecting "**Music**". You will have full flexibility of managing music on your memory card.

* When the host phone is playing music, you can control the music player and music using the local phone.

* Depends on software version and countries. If your phone have this feature, please activate BT dialer firstly (refer to 9.5 BT dialer for activation).

12 My files .....

You will have access to all audio and visual files stored in memory card in My files. You can access a number of items with this option: **My audios, Images, Received,** etc.

Inserting the memory card:



To release the microSD card holder, slide it in the direction of the arrow and lift it. Then insert the microSD card with the golden contact downward. Finally, turn down the microSD holder and slide it in the opposite direction to lock it.

13 Latin input mode ...

To write messages, there are two writing methods:

- Normal: this mode allows you to type a text by choosing a letter or a sequence of characters associated with a key.
- Predictive with the eZi mode: this mode speeds up the writing of your text.
- + key in edit mode
  Press: access the symbols table
  Press and hold: enter zero

IP4751_ALCATEL 1046G_1046D_QG_Eng_GB_11_140326.indd 1
2014-3-26 9:42:38

Safety and use.....

We recommend that you read this chapter carefully before using your phone. The manufacturer disclaims any liability for damage, which may result as a consequence of improper use or use contrary to the instructions contained herein.

• TRAFFIC SAFETY:

Given that studies show that using a mobile phone while driving a vehicle constitutes a real risk, even when the hands-free kit is used (car kit, headset...), drivers are requested to refrain from using their mobile when the vehicle is not parked.

When driving, do not use your phone and headphone to listen to music or to the radio. Using a headphone can be dangerous and forbidden in some areas.

When switched on, your phone emits electromagnetic waves that can interfere with the vehicle's electronic systems such as ABS anti-lock brakes or airbags. To ensure that there is no problem:

- do not place your phone on top of the dashboard or within an airbag deployment area,
- check with your car dealer or the car manufacturer to make sure that the dashboard is adequately shielded from mobile phone RF energy.

• CONDITIONS OF USE:

You are advised to switch off the telephone from time to time to optimise its performance.

Switch the phone off before boarding an aircraft.

Switch the phone off when you are in health care facilities, except in designated areas. As with many other types of equipment now in regular use, mobile telephones can interfere with other electrical or electronic devices, or equipment using radio frequency.

Switch the phone off when you are near gas or flammable liquids. Strictly obey all signs and instructions posted in a fuel depot, petrol station, or chemical plant, or in any potentially explosive atmosphere.

When the phone is switched on, it should be kept at least 15 cm from any medical device such as a pacemaker, a hearing aid or insulin pump, etc. In particular when using the phone, you should hold it against the ear on the opposite side to the device, if any.

To avoid hearing impairment, pick up the call before holding your phone to your ear. Also move the handset away from your ear while using the "hands-free" mode because the amplified volume might cause hearing damage.

Do not let children use the phone and/or play with the telephone and accessories without supervision.

When replacing the cover please note that your phone may contain substances that could create an allergic reaction.

Always handle your phone with care and keep it in a clean and dust-free place.

Do not allow your phone to be exposed to adverse weather or environmental conditions (moisture, humidity, rain, infiltration of liquids, dust, sea air, etc). The manufacturer's recommended operating temperature range is -10°C to +55°C.

At over 55°C the legibility of the phone's display may be impaired, though this is temporary and not serious.

Emergency call numbers may not be reachable on all cellular networks. You should never rely only on your phone for emergency calls.

Do not open, dismantle or attempt to repair your mobile phone yourself.

Do not drop, throw or bend your mobile phone.

Do not use the phone if the glass made screen, is damaged, cracked or broken to avoid any injury.

Do not paint it.

Use only batteries, battery chargers, and accessories which are recommended by TCT Mobile Limited and its affiliates and are compatible with your phone model. TCT Mobile Limited and its affiliates disclaim any liability for damage caused by the use of other chargers or batteries.

Remember to make back-up copies or keep a written record of all important information stored in your phone.

Some people may suffer epileptic seizures or blackouts when exposed to flashing lights, or when playing video games. These seizures or blackouts may occur even if a person never had a previous seizure or blackout. If you have experienced seizures or blackouts, or if you have a family history of such occurrences, please consult your doctor before playing video games on your phone or enabling a flashing-lights feature on your phone.

Parents should monitor their children's use of video games or other features that incorporate flashing lights on the phones. All persons should discontinue use and consult a doctor if any of the following symptoms occur: convulsion, eye or muscle twitching, loss of awareness, involuntary movements, or disorientation. To limit the likelihood of such symptoms, please take the following safety precautions:

- Do not play or use a flashing-lights feature if you are tired or need sleep.
- Take a minimum of a 15-minute break hourly.
- Play in a room in which all lights are on.
- Play at the farthest distance possible from the screen.
- If your hands, wrists, or arms become tired or sore while playing, stop and rest for several hours before playing again.
- If you continue to have sore hands, wrists, or arms during or after playing, stop the game and see a doctor.

When you play games on your phone, you may experience occasional discomfort in your hands, arms, shoulders, neck, or other parts of your body. Follow the instructions to avoid problems such as tendinitis, carpal tunnel syndrome, or other musculoskeletal disorders.

PROTECT YOUR HEARING

To prevent possible hearing damage, do not listen at high volume levels for long periods. Exercise caution when holding your device near your ear while the loudspeaker is in use.

• PRIVACY:

Please note that you must respect the laws and regulations in force in your jurisdiction or other jurisdiction(s) where you will use your mobile phone regarding taking photographs and recording sounds with your mobile telephone. Pursuant to such laws and regulations, it may be strictly forbidden to take photographs and/or to record the voices of other people or any of their personal attributes, and duplicate or distribute them, as this may be considered to be an invasion of privacy. It is the user's sole responsibility to ensure that prior authorisation be obtained, if necessary, in order to record private or confidential conversations or take a photograph of another person; the manufacturer, the seller or vendor of your mobile phone (including the operator) disclaim any liability which may result from the improper use of the mobile phone.

• BATTERY:

Before removing the battery from your phone, please make sure that the phone is switched off.

Observe the following precautions for battery use:

- Do not attempt to open the battery (due to the risk of toxic fumes and burns),
- Do not puncture, disassemble or cause a short-circuit in a battery,
- Do not burn or dispose of a used battery in household rubbish or store it at temperatures above 60 °C.

Batteries must be disposed of in accordance with locally applicable environmental regulations. Only use the battery for the purpose for which it was designed. Never use damaged batteries or those not recommended by TCT Mobile Limited and/or its affiliates.

This symbol on your telephone, the battery and the accessories means that these phones must be taken to collection points at the end of their life:

- Municipal waste disposal centres with specific bins for these items of equipment
- Collection bins at points of sale.

They will then be recycled, preventing substances being disposed of in the environment, so that their components can be reused.

In European Union countries:

These collection points are accessible free of charge.

All phones with this sign must be brought to these collection points.

In non European Union jurisdictions:

Items of equipment with this symbol are not to be thrown into ordinary bins if your jurisdiction or your region has suitable recycling and collection facilities; instead they are to be taken to collection points for them to be recycled.

CAUTION: RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS

• CHARGERS

Mains powered chargers will operate within the temperature range of: 0 °C to 40 °C.

The chargers designed for your mobile phone meet with the standard for safety of information technology equipment and office equipment use. They are also compliant to the ecodesign directive 2009/125/EC. Due to different applicable electrical specifications, a charger you purchased in one jurisdiction may not work in another jurisdiction. They should be used for this purpose only.

• RADIO WAVES:

Proof of compliance with international standards (ICNIRP) or with European Directive 1999/5/EC (R&TTE) is required of all mobile phone models before they can be put on the market. The protection of the health and safety for the user and any other person is an essential requirement of these standards or this directive.

THIS DEVICE MEETS INTERNATIONAL GUIDELINES FOR EXPOSURE TO RADIO WAVES.

Your mobile device is a radio transmitter and receiver. It is designed not to exceed the limits for exposure to radio waves (radio frequency electromagnetic fields) recommended by international guidelines. The guidelines were developed by an independent scientific organization (ICNIRP) and include a substantial safety margin designed to assure the safety of all persons, regardless of age and health.

The radio wave exposure guidelines use a unit of measurement known as the Specific Absorption Rate, or SAR. The SAR limit for mobile devices is 2 W/kg.

Tests for SAR are conducted using standard operating positions with the device transmitting at its highest certified power level in all tested frequency bands. The highest SAR values under the ICNIRP guidelines for this device model are:

1046G:

Maximum SAR for this model and conditions under which it was recorded.		
Head SAR	GSM900 + Bluetooth	0.987 W/kg
Body-worn SAR	GSM900 + Bluetooth	1.07 W/kg

1046D:

Maximum SAR for this model and conditions under which it was recorded.		
Head SAR	GSM900 + Bluetooth	0.987 W/kg
Body-worn SAR	GSM900 + Bluetooth	1.07 W/kg

During use, the actual SAR values for this device are usually well below the values stated above. This is because, for purposes of system efficiency and to minimize interference on the network, the operating power of your mobile device is automatically decreased when full power is not needed for the call. The lower the power output of the device, the lower its SAR value.

Body-worn SAR testing has been carried out at a separation distance of 10 mm. To meet RF exposure guidelines during body-worn operation, the device should be positioned at least this distance away from the body. If you are not using an approved accessory ensure that whatever product is used is free of any metal and that it positions the phone the indicated distance away from the body.

Organizations such as the World Health Organization and the US Food and Drug Administration have stated that if people are concerned and want to reduce their exposure they could use a hands-free device to keep the phone away from the head and body during phone calls, or reduce the amount of time spent on the phone.

For more information you can go to www.alcatelonetouch.com

Additional information about electromagnetic fields and public health are available on the following site: http://www.who.int/peh-emf.

Your telephone is equipped with a built-in antenna. For optimal operation, you should avoid touching it or degrading it.

As mobile devices offer a range of functions, they can be used in positions other than against your ear. In such circumstances the device will be compliant with the guidelines when used with headset or usb data cable. If you are using another accessory ensure that whatever product is used is free of any metal and that it positions the phone at least 10 mm away from the body.

• Regulatory information

The following approvals and notices apply in specific regions as noted.

1046G:

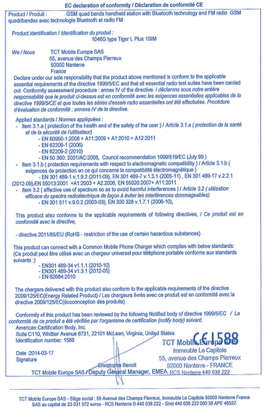
TCT Mobile

TCT Mobile Europe SAS
55 Avenue des Champs Pierreux,
Immeuble Le Capitole 92000 Nanterre, France
+33 1 46 52 61 00

EC declaration of conformity / Déclaration de conformité CE

Product / Produit : GSM quad bands handheld station with Bluetooth technology and FM radio GSM quadribandes avec technologie Bluetooth et radio FM

Product identification / Identification du produit :
1046D type Tiger L Plus 1S8M

We / Nous TCT Mobile Europe SAS
55, avenue des Champs Pierreux
92000 Nanterre
France

Declare under our sole responsibility that the product above mentioned is conform to the applicable essential requirements of the directive 1999/5/EC and that all essential radio test suites have been carried out. Conformity assessment procedure : annex IV of the directive. / déclarons sous notre entière responsabilité que le produit ci-dessus est en conformité avec les exigences essentielles applicables de la directive 1999/5/CE et que toutes les séries d'essais radio essentielles ont été effectuées. Procédure d'évaluation de conformité : annexe IV de la directive.

Applied standards / Normes appliquées :
- Item 3.1.a (protection of the health and of the safety of the user) / Article 3.1.a (protection de la santé et de la sécurité de l'utilisateur)
  - EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011
  - EN 62209-1 (2006)
  - EN 62209-2 (2010)
  - EN 50 360 : 2001/AC:2006, Council recommendation 1999/519/EC (July 99)
- Item 3.1.b (protection requirements with respect to electromagnetic compatibility) / Article 3.1.b (exigences de protection en ce qui concerne la compatibilité électromagnétique) :
  - EN 301 489-1 v.1.9.2 (2011-09), EN 301 489-7 v.1.3.1 (2005-11), EN 301 489-17 v.2.2.1 (2012-09),EN 55013:2001 +A1:2003 + A2:2006, EN 55020:2007+ A11:2011
- Item 3.2 (effective use of spectrum so as to avoid harmful interferences) / Article 3.2 (utilisation efficace du spectre radioélectrique de façon à éviter les interférences dommageables)
  - EN 301 511 v.9.0.2 (2003-03), EN 302 328 v.1.7.1 (2006-10),

This product also conforms to the applicable requirements of following directives, / Ce produit est en conformité avec la directive,

- directive 2011/65/EU (RoHS - restriction of the use of certain hazardous substances)

This product can connect with a Common Mobile Phone Charger which complies with below standards: (Ce produit peut être utilisé avec un chargeur universel pour téléphone portable conforme aux standards suivants :)
- EN301 489-34 v1.1.1 (2010-10)
- EN301 489-34 v1.2.1 (2012-03)
- EN 62684:2010

The chargers delivered with this product also conform to the applicable requirements of the directive 2009/125/CE(Energy Related Product) / Les chargeurs livrés avec ce produit est en conformité avec la directive 2009/125/CE(consommation des produits)

Conformity of this product has been reviewed by the following Notified body of directive 1999/5/EC / La conformité de ce produit a été vérifiée par l'organisme de certification (notify body) suivant:
American Certification Body, Inc.
Suite C110, Whittier Avenue 6731, 22101 McLean, Virginia, United States
Identification number: 1588

Date: 2014-03-19
Signature

Christophe Benoit
TCT Mobile Europe SAS / Deputy General Manager, EMEA

CE 1588

TCT Mobile Europe SAS - Siège social : 55 Avenue des Champs Pierreux, Immeuble Le Capitole 92000 Nanterre France
SAS au capital de 23 031 072 euros - RCS Nanterre B 440 038 222 - Siret 440 038 222 000 36 APE 4652Z

1046D:

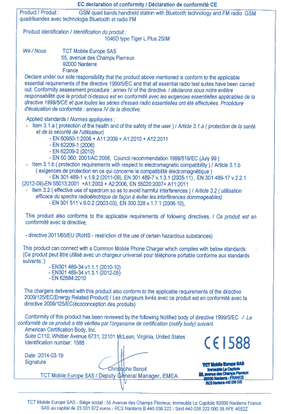
TCT Mobile

TCT Mobile Europe SAS
55 Avenue des Champs Pierreux,
Immeuble Le Capitole 92000 Nanterre, France
+33 1 46 52 61 00

CC declaration of conformity / Déclaration de conformité CE

Product / Produit : GSM quad bands handheld station with Bluetooth technology and FM radio GSM quadribandes avec technologie Bluetooth et radio FM

Product identification / Identification du produit :
1046D type Tiger L Plus 2S3M

We / Nous TCT Mobile Europe SAS
55, avenue des Champs Pierreux
92000 Nanterre
France

Declare under our sole responsibility that the product above mentioned is conform to the applicable essential requirements of the directive 1999/5/EC and that all essential radio test suites have been carried out. Conformity assessment procedure : annex IV of the directive. / déclarons sous notre entière responsabilité que le produit ci-dessus est en conformité avec les exigences essentielles applicables de la directive 1999/5/CE et que toutes les séries d'essais radio essentielles ont été effectuées. Procédure d'évaluation de conformité : annexe IV de la directive.

Applied standards / Normes appliquées :
- Item 3.1.a (protection of the health and of the safety of the user) / Article 3.1.a (protection de la santé et de la sécurité de l'utilisateur)
  - EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011
  - EN 62209-1 (2006)
  - EN 62209-2 (2010)
  - EN 50 360 : 2001/AC:2006, Council recommendation 1999/519/EC (July 99)
- Item 3.1.b (protection requirements with respect to electromagnetic compatibility) / Article 3.1.b (exigences de protection en ce qui concerne la compatibilité électromagnétique) :
  - EN 301 489-1 v.1.9.2 (2011-09), EN 301 489-7 v.1.3.1 (2005-11), EN 301 489-17 v.2.2.1 (2012-09),EN 55013:2001 +A1:2003 + A2:2006, EN 55020:2007+ A11:2011
- Item 3.2 (effective use of spectrum so as to avoid harmful interferences) / Article 3.2 (utilisation efficace du spectre radioélectrique de façon à éviter les interférences dommageables)
  - EN 301 511 v.9.0.2 (2003-03), EN 302 328 v.1.7.1 (2006-10),

This product also conforms to the applicable requirements of following directives, / Ce produit est en conformité avec la directive,

- directive 2011/65/EU (RoHS - restriction of the use of certain hazardous substances)

This product can connect with a Common Mobile Phone Charger which complies with below standards: (Ce produit peut être utilisé avec un chargeur universel pour téléphone portable conforme aux standards suivants :)
- EN301 489-34 v1.1.1 (2010-10)
- EN301 489-34 v1.2.1 (2012-03)
- EN 62684:2010

The chargers delivered with this product also conform to the applicable requirements of the directive 2009/125/CE(Energy Related Product) / Les chargeurs livrés avec ce produit est en conformité avec la directive 2009/125/CE(consommation des produits)

Conformity of this product has been reviewed by the following Notified body of directive 1999/5/EC / La conformité de ce produit a été vérifiée par l'organisme de certification (notify body) suivant:
American Certification Body, Inc.
Suite C110, Whittier Avenue 6731, 22101 McLean, Virginia, United States
Identification number: 1588

Date: 2014-03-19
Signature

Christophe Benoit
TCT Mobile Europe SAS / Deputy General Manager, EMEA

CE 1588

TCT Mobile Europe SAS - Siège social : 55 Avenue des Champs Pierreux, Immeuble Le Capitole 92000 Nanterre France
SAS au capital de 23 031 072 euros - RCS Nanterre B 440 038 222 - Siret 440 038 222 000 36 APE 4652Z

• LICENCES

Obigo® is a registered trademark of Obigo AB.

microSD Logo is a trademark.

eZiText™ and Zi™ are trademarks of Zi Corporation and/or its Affiliates.

The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by TCT Mobile Limited and its affiliates is under license. Other trademarks and trade names are those of their respective owners.

1046G/1046D BLUETOOTH DECLARATION ID D022118

General information .....

- **Internet address:** www.alcatelonetouch.com
- **Hot Line Number:** see "TCT Mobile Services" leaflet or go to our Internet site.
- **Address:** Room 1910-12A, Tower 3, China HK City, 33 Canton Road, Tsimshatsui, Kowloon, Hong Kong

On our Internet site, you will find our FAQ (Frequently Asked Questions) section. You can also contact us by e-mail to ask any questions you may have.

An electronic version of this user guide is available in English and other languages according to availability on our server:

www.alcatelonetouch.com

Your telephone is a transceiver that operates on GSM networks in qual band with 850/900/1800/1900 MHz bands.

CE 1588

This equipment is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC. The entire copy of the Declaration of Conformity for your telephone can be obtained through our website: www.alcatelonetouch.com.

Protection against theft (1)

Your telephone is identified by an IMEI (phone serial number) shown on the packaging label and in the phone's memory. We recommend that you note the number the first time you use your telephone by entering * # 0 6 # and keep it in a safe place. It may be requested by the police or your operator if your telephone is stolen. This number allows your mobile telephone to be blocked preventing a third person from using it, even with a different SIM card.

Disclaimer

There may be certain differences between the user manual description and the phone's operation, depending on the software release of your telephone or specific operator services.

TCT Mobile shall not be held legally responsible for such differences, if any, nor for their potential consequences, which responsibility shall be borne by the operator exclusively.

(1) Contact your network operator to check service availability.

Telephone warranty .....

Your phone is warranted against any defect or malfunctioning which may occur in conditions of normal use during the warranty period of twelve (12) months (1) from the date of purchase as shown on your original invoice.

Batteries (2) and accessories sold with your phone are also warranted against any defect which may occur during the first six (6) months (1) from the date of purchase as shown on your original invoice.

In case of any defect of your phone which prevents you from normal use thereof, you must immediately inform your vendor and present your phone with your proof of purchase.

If the defect is confirmed, your phone or part thereof will be either replaced or repaired, as appropriate. Repaired Phone and accessories are entitled to a one (1) month warranty for the same defect. Repair or replacement may be carried out using reconditioned components offering equivalent functionality.

This warranty covers the cost of parts and labor but excludes any other costs.

(1) The warranty period may vary depending on your country.

(2) The life of a rechargeable mobile phone battery in terms of conversation time standby time, and total service life, will depend on the conditions of use and network configuration. Batteries being considered expendable supplies, the specifications state that you should obtain optimal performance for your phone during the first six months after purchase and for approximately 200 more recharges.

This warranty shall not apply to defects or your phone and/or accessory due to (without any limitation):

1) Non-compliance with the instructions for use or installation, or with technical and safety standards applicable in the geographical area where your phone is used,
2) Connection to any equipment not supplied or not recommended by TCT Mobile Limited,
3) Modification or repair performed by individuals not authorised by TCT Mobile Limited or its affiliates or your vendor,
4) Modification, adjustment or alteration of software or hardware performed by individuals not authorized by TCT Mobile Limited,
5) Inclement weather, lightning, fire, humidity, infiltration of liquids or foods, chemical phones, download of files, crash, high voltage, corrosion, oxidation…

Your phone will not be repaired in case labels or serial numbers (IMEI) have been removed or altered.

There are no express warranties, whether written, oral or implied, other than this printed limited warranty or the mandatory warranty provided by your country or jurisdiction.

In no event shall TCT Mobile Limited or any of its affiliates be liable for indirect, incidental or consequential damages of any nature whatsoever, including but not limited commercial or financial loss or damage, loss of data or loss of image to the full extent those damages can be disclaimed by law.

Some countries/states do not allow the exclusion or limitation of indirect, incidental or consequential damages, or limitation of the duration of implied warranties, so the preceding limitations or exclusions may not apply to you.

Troubleshooting.....

Before contacting the service centre, you are advised to follow the instructions below:

- You are advised to fully charge ( ) the battery for optimal operation.
- Avoid storing large amounts of data in your phone as this may affect its performance.
- Use User Data Format (1) to perform phone formatting (to perform User Data format, hold down # key while simultaneously pressing the power on/off key under power off mode). ALL User phone data: contacts, messages and files will be lost permanently. It is strongly advised to fully backup the phone data and profile before doing formatting.

My phone cannot switch on

- Check the battery contacts, remove and reinstall your battery, then turn your phone on
- Check the battery power level, charge for at least 20 minutes
- If it still does not work, please use User Data Format (1) to reset the phone

My phone is frozen or has not responded for several minutes

- Restart your phone by pressing and holding the key
- Remove the battery and re-insert it, then restart the phone
- If it still does not work, please use User Data Format (1) to reset the phone

My phone turns off by itself

- Make sure power off key is not mis-contacted
- Check the battery charge level
- If it still does not work, please use User Data Format (1) to reset the phone

My phone cannot charge properly

- Make sure you are using an ALCATEL ONETOUCH battery and the charger from the box
- Clean the battery contact if it's dirty.
- Make sure your battery is inserted properly before plugging in the charger.
- Make sure that your battery is not completely discharged; if the battery power is empty for a long time, it may take around 20 minutes to display the battery charger indicator on the screen
- Make sure charging is carried out under normal conditions (0°C to +40°C)
- When abroad, check that the voltage input is compatible

My phone cannot connect to a network or "No service" is displayed

- Try connecting in another location
- Verify the network coverage with your operator
- Check with your operator that your SIM card is valid
- Try selecting the available network(s) manually
- Try connecting at a later time if the network is overloaded

Invalid SIM card

- Make sure the SIM card has been correctly inserted
- Make sure the chip on your SIM card is not damaged or scratched
- Make sure the service of your SIM card is available

Unable to make outgoing calls

- Make sure you have dialed a valid number and press the key
- For international calls, check the country and area codes
- Make sure your phone is connected to a network, and the network is not overloaded or unavailable
- Check your subscription status with your operator (credit, SIM card valid, etc.)
- Make sure you have not barred outgoing calls
- Make sure that your phone is not in flight mode

Unable to receive incoming calls

- Make sure your phone is switched on and connected to a network (check for overloaded or unavailable network)
- Check your subscription status with your operator (credit, SIM card valid, etc.)
- Make sure you have not forwarded incoming calls
- Make sure that you have not barred certain calls
- Make sure that your phone is not in flight mode

The caller's name/number does not appear when a call is received

- Check that you have subscribed to this service with your operator
- Your caller has concealed his/her name or number

I cannot find my contacts

- Make sure your SIM card is not broken
- Make sure your SIM card is inserted properly
- Import all contacts stored in SIM card to phone

The sound quality of the calls is poor

- You can adjust the volume during a call by pressing the key
- Check the network strength
- Make sure that the receiver, connector or speaker on your phone is clean

I am unable to use the features described in the manual

- Check with your operator to make sure that your subscription includes this service
- Make sure this feature does not require an ALCATEL ONETOUCH accessory

When I select a number from my contacts, the number cannot be dialed

- Make sure that you have correctly recorded the number in your file
- Make sure that you have inputted the country prefix when calling a foreign country

I am unable to add a contact in my contacts

- Make sure that your SIM card contacts are not full; delete some files from your SIM card or save the files in the phone contacts

My callers are unable to leave messages on my voicemail

- Contact your network operator to check service availability

I cannot access my voicemail

- Make sure your operator's voicemail number is correctly entered in **"Messages\Voicemail"**
- Try later if the network is busy

The flickering icon is displayed on my standby screen

- You have saved too many short messages on your SIM card; delete some of them or archive them in the phone memory

SIM card PIN locked

- Contact your network operator to obtain the PUK code (Personal Unblocking Key)

How to make your battery last longer

- Make sure you follow the complete charge time (minimum 3 hours)
- After a partial charge, the battery level indicator may not be exact. Wait for at least 20 minutes after removing the charger to obtain an exact indication
- Switch on the backlight upon request

(1) **User Data Format** ALL user phone data: Contacts, messages and files will be lost permanently. Please store phone data in SIM card before you want to format

ALCATEL is a trademark of Alcatel-Lucent and used under license by TCT Mobile Limited.

All rights reserved © Copyright 2014 TCT Mobile Limited.

TCT Mobile Limited reserves the right to alter material or technical specification without prior notice.

PROTECT YOUR HEARING

To prevent possible hearing damage, do not listen at high volume levels for long periods. Exercise caution when holding your device near your ear while the loudspeaker is in use.

IP4751_ALCATEL 1046G_1046D_QG_Eng_GB_11_140326.indd 2
2014-3-26 9:42:45